


LRX-I

PHOTOMETRICS

6K - HMI

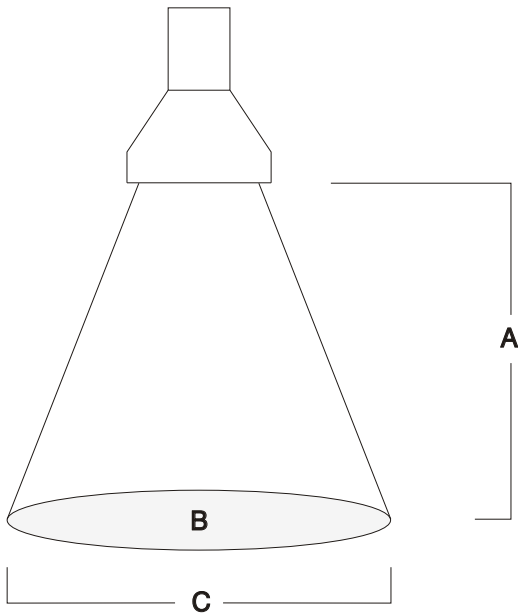

INDIVIDUAL HEAD SPOT

(A) DISTANCE	200'	400'	500'	660'
(B) F. STOP 500 ASA 24 FPS.	8.0 ₄	4.0 ₇	4.0 ₀	2.8 ₁
(C) 1/2 PEAK DIA.	30'	58'	72'	94'

INDIVIDUAL HEAD FLOOD

(A) DISTANCE	200'	400'	500'	660'
(B) F. STOP 500 ASA 24 FPS.	4.0 ₀	2.0 ₀	1.4 ₁	1.0 ₄
(C) 1/2 PEAK DIA.	130'	256'	322'	424'

TRUCK SPECIFICATIONS

HEIGHT:	13' 4"
LENGHT:	36' 3"
WIDTH:	
TRAVELING -	8' 6"
SETUP -	18'
WEIGHT:	
FRONT -	11,000 LBS.
REAR -	40,000 LBS.
TOTAL -	51,000 LBS.

CRANE SPECIFICATIONS

MAIN BOOM:	70'
HYDRALIC JIB:	20'
LIGHT TOWER:	10'
TOTAL HEIGHT:	100'

ARTICULATION

MAIN BOOM ROTATION:	360 DEG.
LIGHT TOWER ROTATION:	360 DEG.
HYDRAULIC JIB EXTENSION:	180 DEG.
LIGHT HEAD PAN:	360 DEG.
LIGHT HEAD TILT:	270 DEG.


SUBJECT TO CHANGE WITHOUT NOTICE

DWIGHT CRANE LTD. TORONTO - ONTARIO CANADA 416-287-3107

www.dwightcrane.com

LRX III

PHOTOMETRICS **TUNGSTEN**

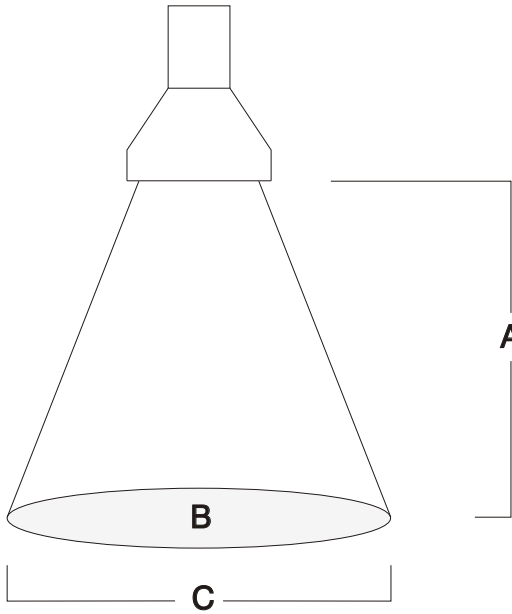

USING SINGLE ENDED 12,000 WATT BULBS

INDIVIDUAL HEAD SPOT

(A) DISTANCE	200'	400'	500'	600'
(B) F. STOP 500 ASA 24 FPS.	4.0 ₁	2.0 ₃	1.4 ₇	1.4 ₁
(C) 1/2 PEAK DIA.	30'	58'	72'	94'

INDIVIDUAL HEAD FLOOD

(A) DISTANCE	200'	400'	500'	600'
(B) F. STOP 500 ASA 24 FPS.	2.0 ₅	1.0 ₃	NA	NA
(C) 1/2 PEAK DIA.	130'	256'	NA	NA

SIX HEAD SPOT

(A) DISTANCE	200'	400'	500'	600'
(B) F. STOP 500 ASA 24 FPS.	8.0 ₅	4.0 ₄	4.0	2.8 ₄
(C) 1/2 PEAK DIA.	30'	58'	72'	94'

SIX HEAD FLOOD

(A) DISTANCE	200'	400'	500'	600'
(B) F. STOP 500 ASA 24 FPS.	4.0 ₅	2.0 ₆	1.4 ₉	1.4 ₄
(C) 1/2 PEAK DIA.	130'	256'	322'	424'

TRUCK SPECIFICATIONS

HEIGHT: 13' 4"

LENGTH: 36' 3"

WIDTH:

TRAVELING - 8' 6"

SETUP - 22'

WEIGHT:

FRONT - 14,550 LBS.

REAR - 36450 LBS.

TOTAL - 51,000 LBS.

CRANE SPECIFICATIONS

MAIN BOOM: 95'

HYDRALIC JIB: 20'

LIGHT TOWER: 5'

TOTAL HEIGHT: 120'

ARTICULATION

MAIN BOOM ROTATION: 360 DEG.

LIGHT TOWER ROTATION: 360 DEG.

HYDRAULIC JIB EXTENSION: 180 DEG.

LIGHT HEAD PAN: 360 DEG.

LIGHT HEAD TILT: 270 DEG.

SUBJECT TO CHANGE WITHOUT NOTICE


DWIGHT CRANE LTD. TORONTO - ONTARIO CANADA 416-287-3107

www.dwightcrane.com

LRX III

PHOTOMETRICS

****6K-HMI****

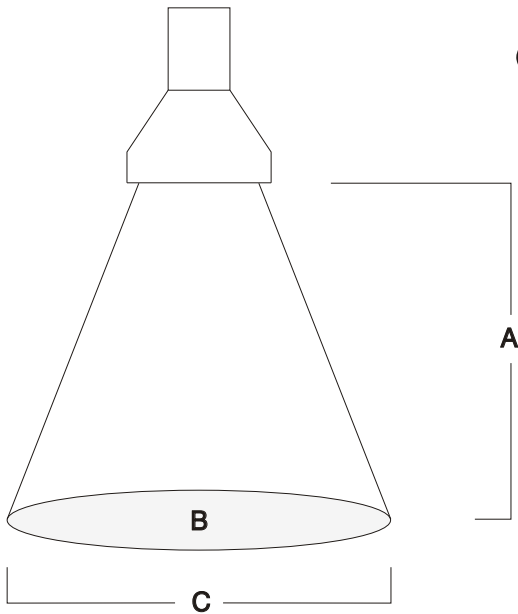

INDIVIDUAL HEAD SPOT

(A) DISTANCE	200'	400'	500'	660'
(B) F. STOP 500 ASA 24 FPS.	8.0 ₄	4.0 ₇	4.0 ₀	2.8 ₁
(C) 1/2 PEAK DIA.	30'	58'	72'	94'

INDIVIDUAL HEAD FLOOD

(A) DISTANCE	200'	400'	500'	660'
(B) F. STOP 500 ASA 24 FPS.	4.0 ₀	2.0 ₀	1.4 ₁	1.0 ₄
(C) 1/2 PEAK DIA.	130'	256'	322'	424'

TRUCK SPECIFICATIONS

HEIGHT: 13' 4"
 LENGTH: 36' 3"
 WIDTH:
 TRAVELING - 8' 6"
 SETUP - 22'
 WEIGHT:
 FRONT - 14,550 LBS.
 REAR - 36450 LBS.
 TOTAL - 51,000 LBS.

CRANE SPECIFICATIONS

MAIN BOOM: 95'
 HYDRAULIC JIB: 20'
 LIGHT TOWER: 5'
 TOTAL HEIGHT: 120'

ARTICULATION

MAIN BOOM ROTATION: 360 DEG.
 LIGHT TOWER ROTATION: 360 DEG.
 HYDRAULIC JIB EXTENSION: 180 DEG.
 LIGHT HEAD PAN: 360 DEG.
 LIGHT HEAD TILT: 270 DEG.

SUBJECT TO CHANGE WITHOUT NOTICE


DWIGHT CRANE LTD. TORONTO - ONTARIO CANADA 416-287-3107

www.dwightcrane.com

LRX III

PHOTOMETRICS

**** 12K-HMI ****

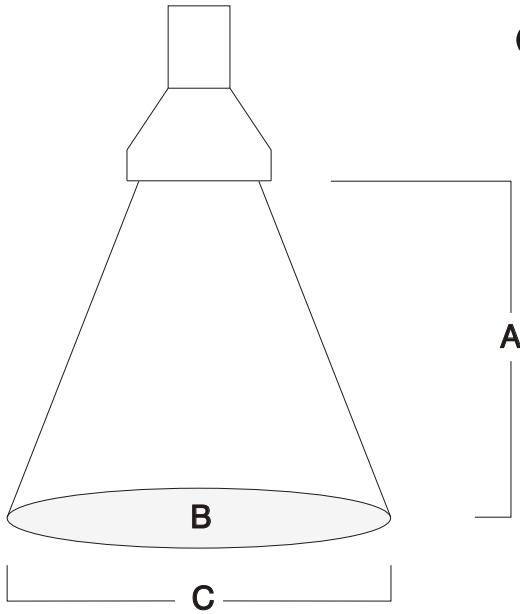

INDIVIDUAL HEAD SPOT 12K - HMI

(A) DISTANCE	200'	400'	500'	660'
(B) F. STOP 500 ASA 24 FPS.	11.1	5.6 ₃	4.0 ₈	4.0
(C) 1/2 PEAK DIA.	42'	84'	106'	138'

INDIVIDUAL HEAD FLOOD 12K - HMI

(A) DISTANCE	200'	400'	500'	660'
(B) F. STOP 500 ASA 24 FPS.	5.6 ₅	2.8 ₂	2.0 ₆	1.4 ₉
(C) 1/2 PEAK DIA.	120'	240'	300'	396'

SIX HEAD SPOT 12K - HMI

(A) DISTANCE	200'	400'	500'	660'
(B) F. STOP 500 ASA 24 FPS.	22.4	11.4	11.1	8.0 ₄
(C) 1/2 PEAK DIA.	42'	84'	106'	138'

SIX HEAD FLOOD 12K - HMI

(A) DISTANCE	200'	400'	500'	660'
(B) F. STOP 500 ASA 24 FPS.	11.1	5.6 ₁	4.07	2.8 ₄
(C) 1/2 PEAK DIA.	120'	240'	300'	396'

TRUCK SPECIFICATIONS

HEIGHT: 13' 4"

LENGTH: 36' 3"

WIDTH:

TRAVELING - 8' 6"

SETUP - 22'

WEIGHT:

FRONT - 14,550 LBS.

REAR - 36450 LBS.

TOTAL - 51,000 LBS.

CRANE SPECIFICATIONS

MAIN BOOM: 95'

HYDRAULIC JIB: 20'

LIGHT TOWER: 5'

TOTAL HEIGHT: 120'

ARTICULATION

MAIN BOOM ROTATION: 360 DEG.

LIGHT TOWER ROTATION: 360 DEG.

HYDRAULIC JIB EXTENSION: 180 DEG.

LIGHT HEAD PAN: 360 DEG.

LIGHT HEAD TILT: 270 DEG.

SUBJECT TO CHANGE WITHOUT NOTICE

DWIGHT CRANE LTD. TORONTO - ONTARIO CANADA 416-287-3107

www.dwightcrane.com