


# LRX-I

## PHOTOMETRICS

### 6K - HMI

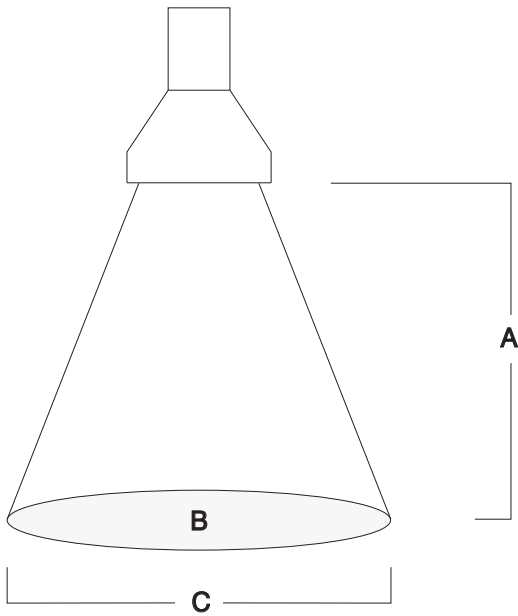

#### INDIVIDUAL HEAD SPOT

(A) DISTANCE	200'	400'	500'	660'
(B) F. STOP 500 ASA 24 FPS.	8.0 <sub>4</sub>	4.0 <sub>7</sub>	4.0 <sub>0</sub>	2.8 <sub>1</sub>
(C) 1/2 PEAK DIA.	30'	58'	72'	94'

#### INDIVIDUAL HEAD FLOOD

(A) DISTANCE	200'	400'	500'	660'
(B) F. STOP 500 ASA 24 FPS.	4.0 <sub>0</sub>	2.0 <sub>0</sub>	1.4 <sub>1</sub>	1.0 <sub>4</sub>
(C) 1/2 PEAK DIA.	130'	256'	322'	424'

#### TRUCK SPECIFICATIONS

HEIGHT:	13' 4"
LENGTH:	36' 3"
WIDTH:	
TRAVELING -	8' 6"
SETUP -	18'
WEIGHT:	
FRONT -	11,000 LBS.
REAR -	40,000 LBS.
TOTAL -	51,000 LBS.

#### CRANE SPECIFICATIONS

MAIN BOOM:	70'
HYDRAULIC JIB:	20'
LIGHT TOWER:	10'
TOTAL HEIGHT:	100'

#### ARTICULATION

MAIN BOOM ROTATION:	360 DEG.
LIGHT TOWER ROTATION:	360 DEG.
HYDRAULIC JIB EXTENSION:	180 DEG.
LIGHT HEAD PAN:	360 DEG.
LIGHT HEAD TILT:	270 DEG.


SUBJECT TO CHANGE WITHOUT NOTICE

**DWIGHT CRANE LTD. TORONTO - ONTARIO CANADA 416-287-3107**

**www.dwightcrane.com**

# LRX III

## PHOTOMETRICS \*\*TUNGSTEN\*\*

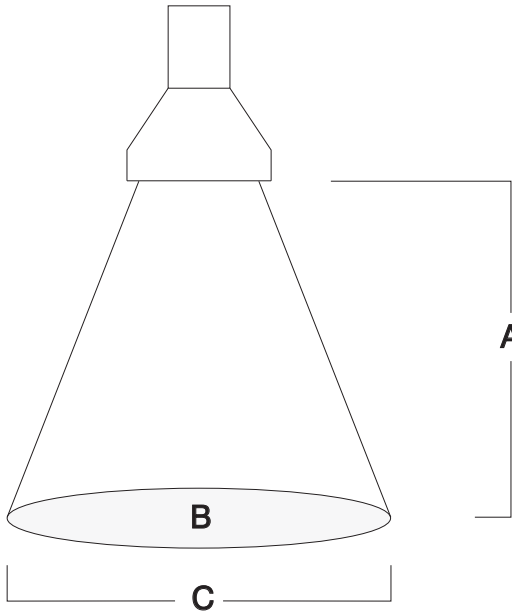

USING SINGLE ENDED 12,000 WATT BULBS

### INDIVIDUAL HEAD SPOT

(A) DISTANCE	200'	400'	500'	600'
(B) F. STOP 500 ASA 24 FPS.	4.0 <sub>1</sub>	2.0 <sub>3</sub>	1.4 <sub>7</sub>	1.4 <sub>1</sub>
(C) 1/2 PEAK DIA.	30'	58'	72'	94'

### INDIVIDUAL HEAD FLOOD

(A) DISTANCE	200'	400'	500'	600'
(B) F. STOP 500 ASA 24 FPS.	2.0 <sub>5</sub>	1.0 <sub>3</sub>	NA	NA
(C) 1/2 PEAK DIA.	130'	256'	NA	NA

### SIX HEAD SPOT

(A) DISTANCE	200'	400'	500'	600'
(B) F. STOP 500 ASA 24 FPS.	8.0 <sub>5</sub>	4.0 <sub>4</sub>	4.0	2.8 <sub>4</sub>
(C) 1/2 PEAK DIA.	30'	58'	72'	94'

### SIX HEAD FLOOD

(A) DISTANCE	200'	400'	500'	600'
(B) F. STOP 500 ASA 24 FPS.	4.0 <sub>5</sub>	2.0 <sub>6</sub>	1.4 <sub>9</sub>	1.4 <sub>4</sub>
(C) 1/2 PEAK DIA.	130'	256'	322'	424'

### TRUCK SPECIFICATIONS

HEIGHT: 13' 4"

LENGTH: 36' 3"

WIDTH:

TRAVELING - 8' 6"

SETUP - 22'

WEIGHT:

FRONT - 14,550 LBS.

REAR - 36450 LBS.

TOTAL - 51,000 LBS.

### CRANE SPECIFICATIONS

MAIN BOOM: 95'

HYDRAULIC JIB: 20'

LIGHT TOWER: 5'

TOTAL HEIGHT: 120'

### ARTICULATION

MAIN BOOM ROTATION: 360 DEG.

LIGHT TOWER ROTATION: 360 DEG.

HYDRAULIC JIB EXTENSION: 180 DEG.

LIGHT HEAD PAN: 360 DEG.

LIGHT HEAD TILT: 270 DEG.

SUBJECT TO CHANGE WITHOUT NOTICE


**DWIGHT CRANE LTD. TORONTO - ONTARIO CANADA 416-287-3107**

**www.dwightcrane.com**

# LRX III

## PHOTOMETRICS

**\*\*6K-HMI\*\***

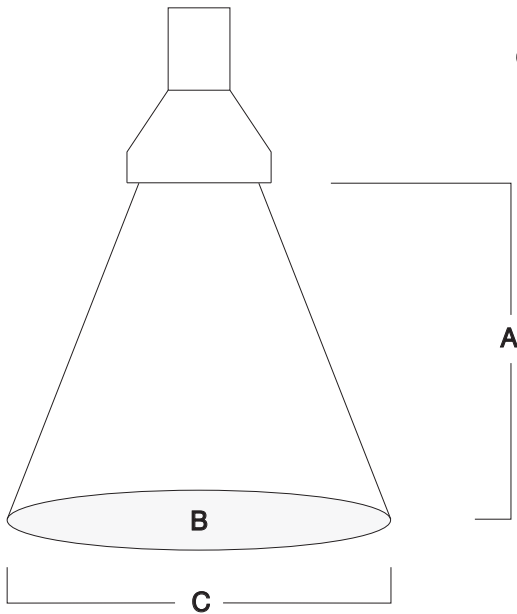

### INDIVIDUAL HEAD SPOT

(A) DISTANCE	200'	400'	500'	660'
(B) F. STOP 500 ASA 24 FPS.	8.0 <sub>4</sub>	4.0 <sub>7</sub>	4.0 <sub>0</sub>	2.8 <sub>1</sub>
(C) 1/2 PEAK DIA.	30'	58'	72'	94'

### INDIVIDUAL HEAD FLOOD

(A) DISTANCE	200'	400'	500'	660'
(B) F. STOP 500 ASA 24 FPS.	4.0 <sub>0</sub>	2.0 <sub>0</sub>	1.4 <sub>1</sub>	1.0 <sub>4</sub>
(C) 1/2 PEAK DIA.	130'	256'	322'	424'

### TRUCK SPECIFICATIONS

HEIGHT: 13' 4"  
 LENGTH: 36' 3"  
 WIDTH:  
 TRAVELING - 8' 6"  
 SETUP - 22'  
 WEIGHT:  
 FRONT - 14,550 LBS.  
 REAR - 36450 LBS.  
 TOTAL - 51,000 LBS.

### CRANE SPECIFICATIONS

MAIN BOOM: 95'  
 HYDRAULIC JIB: 20'  
 LIGHT TOWER: 5'  
 TOTAL HEIGHT: 120'

### ARTICULATION

MAIN BOOM ROTATION: 360 DEG.  
 LIGHT TOWER ROTATION: 360 DEG.  
 HYDRAULIC JIB EXTENSION: 180 DEG.  
 LIGHT HEAD PAN: 360 DEG.  
 LIGHT HEAD TILT: 270 DEG.

SUBJECT TO CHANGE WITHOUT NOTICE


**DWIGHT CRANE LTD. TORONTO - ONTARIO CANADA 416-287-3107**

**www.dwightcrane.com**

# LRX III

## PHOTOMETRICS

**\*\* 12K-HMI \*\***

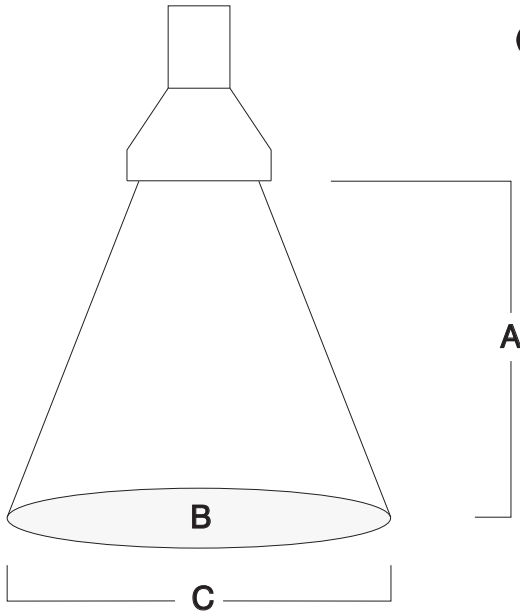

### INDIVIDUAL HEAD SPOT 12K - HMI

(A) DISTANCE	200'	400'	500'	660'
(B) F. STOP 500 ASA 24 FPS.	11.1	5.6 <sub>3</sub>	4.0 <sub>8</sub>	4.0
(C) 1/2 PEAK DIA.	42'	84'	106'	138'

### INDIVIDUAL HEAD FLOOD 12K - HMI

(A) DISTANCE	200'	400'	500'	660'
(B) F. STOP 500 ASA 24 FPS.	5.6 <sub>5</sub>	2.8 <sub>2</sub>	2.0 <sub>6</sub>	1.4 <sub>9</sub>
(C) 1/2 PEAK DIA.	120'	240'	300'	396'

### SIX HEAD SPOT 12K - HMI

(A) DISTANCE	200'	400'	500'	660'
(B) F. STOP 500 ASA 24 FPS.	22.4	11.4	11.1	8.0 <sub>4</sub>
(C) 1/2 PEAK DIA.	42'	84'	106'	138'

### SIX HEAD FLOOD 12K - HMI

(A) DISTANCE	200'	400'	500'	660'
(B) F. STOP 500 ASA 24 FPS.	11.1	5.6 <sub>1</sub>	4.07	2.8 <sub>4</sub>
(C) 1/2 PEAK DIA.	120'	240'	300'	396'

### TRUCK SPECIFICATIONS

HEIGHT: 13' 4"

LENGTH: 36' 3"

WIDTH:

TRAVELING - 8' 6"

SETUP - 22'

WEIGHT:

FRONT - 14,550 LBS.

REAR - 36450 LBS.

TOTAL - 51,000 LBS.

### CRANE SPECIFICATIONS

MAIN BOOM: 95'

HYDRAULIC JIB: 20'

LIGHT TOWER: 5'

TOTAL HEIGHT: 120'

### ARTICULATION

MAIN BOOM ROTATION: 360 DEG.

LIGHT TOWER ROTATION: 360 DEG.

HYDRAULIC JIB EXTENSION: 180 DEG.

LIGHT HEAD PAN: 360 DEG.

LIGHT HEAD TILT: 270 DEG.

SUBJECT TO CHANGE WITHOUT NOTICE

**DWIGHT CRANE LTD. TORONTO - ONTARIO CANADA 416-287-3107**

**www.dwightcrane.com**